

Vehicle AHD Side View Camera SK-V162SMT

V16 side view camera with metal case, IP67 water proof,
Mainly deployed in outdoor application, specially for left side or right side
video surveillance.



Features

- Side view Camera, easy for Pan/tilt adjustment
- 1/2.9" CMOS
- High Resolution: 2MP (1080P)
- Minimum Illumination: 0.1 Lux (F1.2) Color Mode (0Lux IR On, at F1.2) ,
- 3.6mm fixed Lens (2.8/2.1mm lens for option)
- IP67 Water-proof & Dust-proof housing

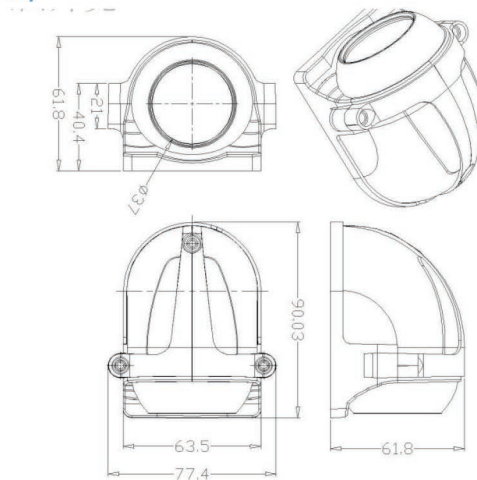
Specification



Model	SK-V162SMT
Camera	
Sensor	1/2.9" CMOS sensor
Signal Format	PAL / NTSC
Picture Elements	1920(H)x1080(V)
Horizontal Resolution	2000TVL (1080P/2 Megapixels)
Lens	Megapixel 3.6mm Fixed Iris Lens(2.8/2.1mm lens for option)
Viewing Angle	3.6mm: 90 degree, 2.8mm: 100 degree, 2.1mm: 120 degree
Lens Mount	M12xP0.5mm Thread
Exterior Focus Adjustment	N/A
Synchronization	Internal sync.
S/N Ratio	Over 44dB(AGC off)
Auto Gain Control	Auto
White Balance	Auto
Electronic Shutter	AUTO/ 1/50 (1/60) -1/100,000sec
Back Light Compensation	Auto
Mirror	No Mirror image by default
Gamma Ratio	0.45
Day & Night	Auto
Auto-iris Lens Control	N/A

IR	
Infrared LED	12 LEDs
Infrared Spectrum	850nm
Infrared LED Range	8m
Sensitivity	0 Lux(Infrared LED On,at F1.2)

Hardware and others	
Video Output	AHD video, 4PIN Aviation female connector
Cable length	30cm by default, can be extended by extension cable
Audio Output	N/A
Pan Adjusting	Available
Tilt Adjusting	Available
Power Supply	12V DC $\pm 10\%$
Power Consumption	160mA $\pm 10\%$
Dimensions(L x W x H)	90x78x61.8(mm)
Net Weight	300g
Protection Level	IP67
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +80°C
Humidity	$\leq 85\%RH$

Dimension(unit: mm)



+12V 1  4 Video
 GND 2  3 Audio
 4PIN Aviation interface -Female

Appearance

